

EN-565

TAPE

UIAA-103



Note: This representation of EN 565 and UIAA 103 does not contain the full details of the test methods and requirements in these standards; it gives only a simplified pictorial presentation.


For full details, EN 565: 2017 and UIAA 103: 2018 should be consulted. © UIAA 2020

Marking

The strength shall be marked with stripes on one side of the tape (see below) in accordance with the table

| number of stripes | minimum strength kN |
|-------------------|---------------------|
| 1 | 5.0 |
| 2 | 10.0 |
| 3 | 15.0 |
| 4 | 20.0 |

In general only the tape with 3 stripes is usual.

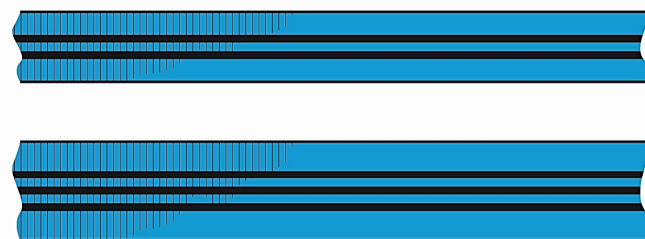

Marking with stripes
(on one side of the tape)

The year of manufacture shall be stated on the drum or packaging on which the tape is supplied.

If tape is supplied on a drum, it may not be one continuous length. In this case the ends of the pieces have to be clearly visible and shall not be joined together.

Designed by Georg Sojer

Additional UIAA Requirement

If tape is sold on a drum or otherwise packaged and consists of more than one piece, the number of pieces shall be stated on the drum.

