

**EN-566**

**SLINGS**


**UIAA-104**



Note: This representation of EN 566 and UIAA 104 does not contain the full details of the test methods and requirements in these standards; it gives only a simplified pictorial presentation.

For full details, EN 566: 2017 and UIAA 104: 2008 should be consulted. © UIAA, 2020

Any kind of sling, and any form of sling closure, and any permanent means of connecting the tape ends, are allowable.

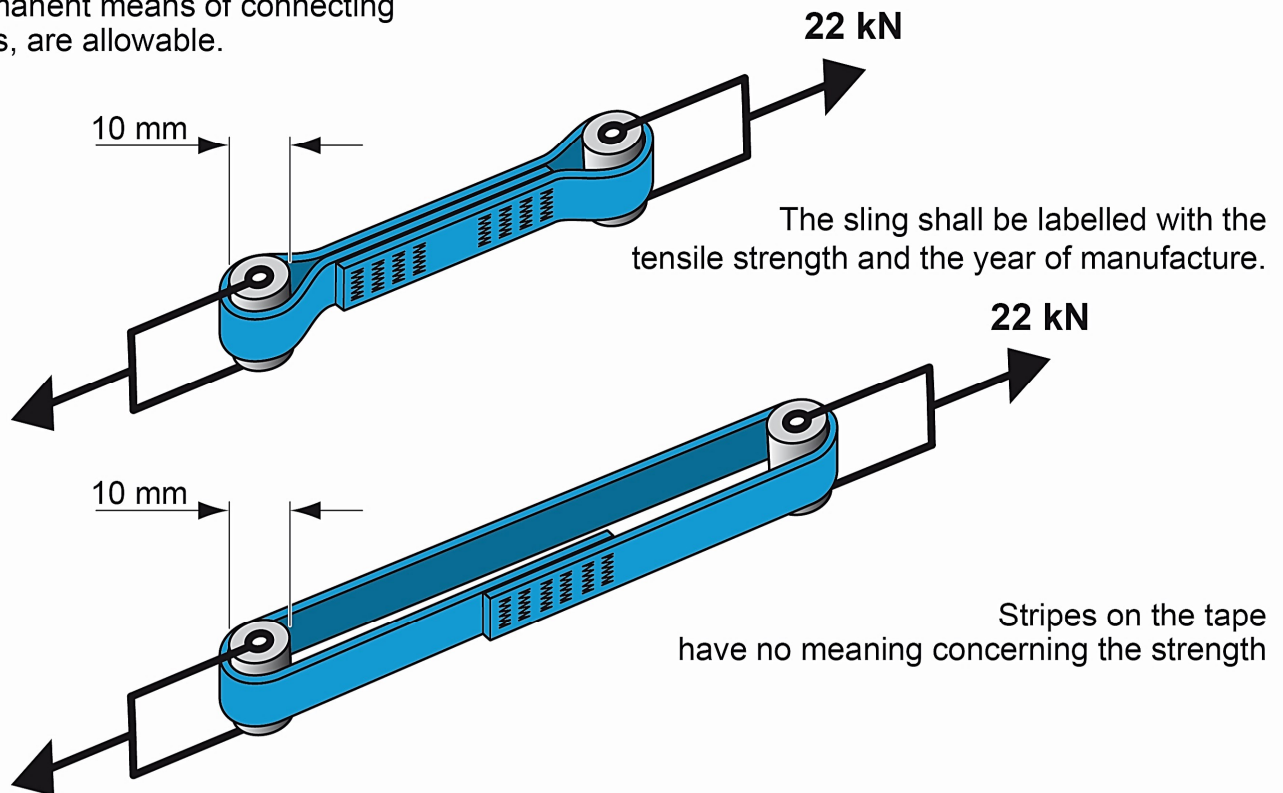

### Additional UIAA Requirement

If slings are made from tape by stitching the tape, at least 50% of the visible area of the stitching shall contrast with the tape in colour.

If slings are made by stitching textiles, the visible area of stitching shall contrast with the tape in colour or surface appearance.

Designed by Georg Sojer